



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-031-105 REV: 1.0

T-1 3/4 (4.7mm) Round Shape LED Lamps

PART NO. : 313-2SYGD/S530-E2 ECN : Page: 1/4


■ Features :

- 4.7mm round without flange.
- Available on tape and reel.
- Reliable and rugged.
- Improved brightness.
- Narrow viewing angle.

■ Description :

- ϕ 4.7mm T-1(3/4)all resin mold.
- General application are indication,illumination,etc.
- The LED lamp is available with different colors,light intensities,epoxy colors,etc.

■ Package Dimension:

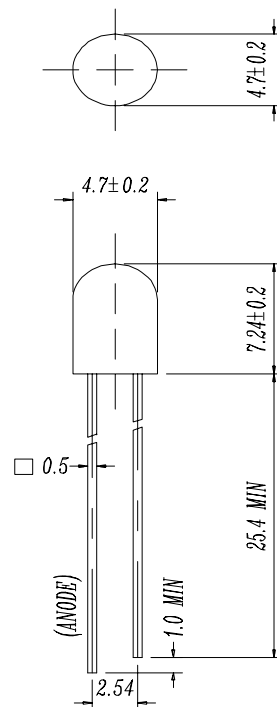

■ Applications :

- TV Set
- Monitor
- Telephone
- Computer

■ Notes :

- 1.All dimensions are in millimeters.
- 2.An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
- 3.Tolerances unless dimension ± 0.25 mm.

PART NO.	Chip		Lens Color
	Material	Emitted Color	
313-2SYGD/S530-E2	AlGaInP	Super Yellow Green	Green Diffused

B89092386.8909037

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-031-105 REV: 1.0

T-1 3/4 (4.7mm) Round Shape LED Lamp

PART NO. : 313-2SYGD/S530-E2 ECN : Page: 2/4

■ Absolute Maximum Ratings at T_A = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	I _F	25	mA
Operating Temperature	T _{opr}	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +100	°C
Soldering Temperature	T _{sol}	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P _d	60	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	I _F (Peak)	160	mA
Reverse Voltage	V _R	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	----- 40	4.0 63	----	mcd	I _F =2mA I _F =20mA
Viewing Angle	2 θ 1/2	----	35	----	deg	I _F =20mA
Peak Wavelength	λ _p	----	575	----	nm	I _F =20mA
Dominant Wavelength	λ _d	----	573	----	nm	I _F =20mA
Spectrum Radiation Bandwidth	△ λ	----	20	----	nm	I _F =20mA
Forward Voltage	V _F	-----	2.0	2.4	V	I _F =20mA
Reverse Current	I _R	----	----	10	μ A	V _R =5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-031-105

REV: 1.0







T-1 3/4 (4.7mm) Round Shape LED Lamp

PART NO. : 313-2SYGD/S530-E2

ECN :

Page: 3/4

■ Typical Electro-Optical Characteristic Curves

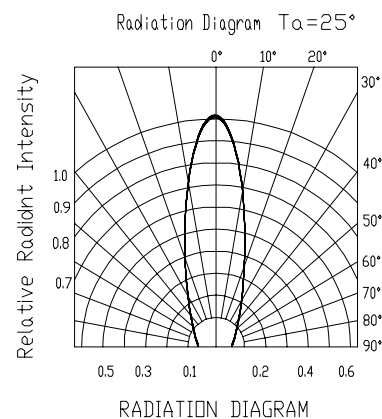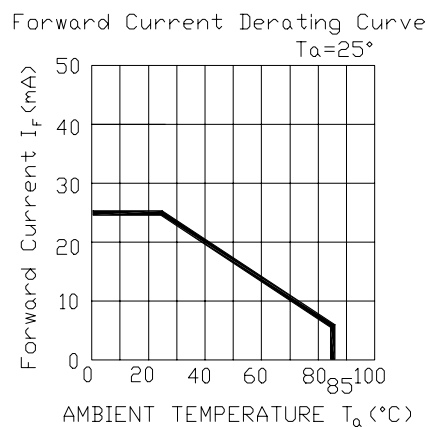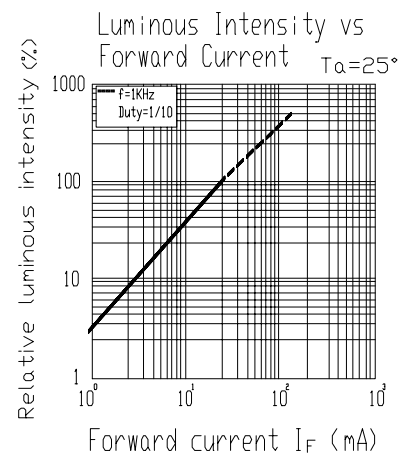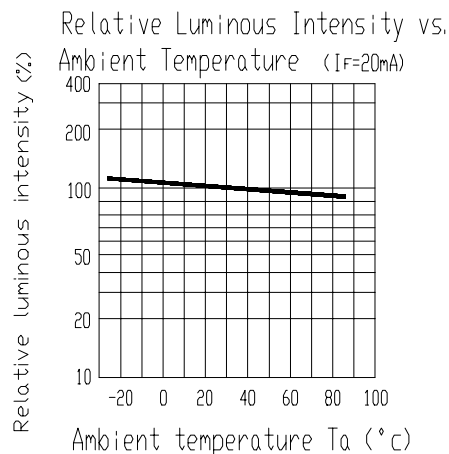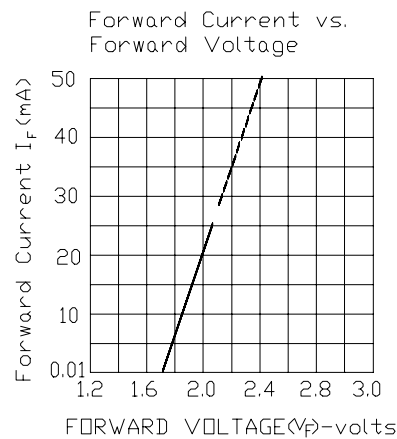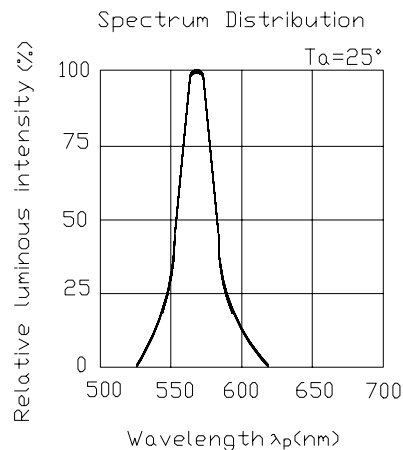



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-031-105 REV: 1.0

T-1 3/4 (4.7mm) Round Shape LED Lamp

PART NO. : 313-2SYGD/S530-E2 ECN : Page: 4/4

■ Reliability test items and conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ┆ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ┆ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C If=20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1