



0805 Package Infrared Chip LED

MODEL NO : PT17-21C/L41/TR8

■ Features :

- Fast response time
- High photo sensitivity
- Small junction capacitance
- High reliability

■ Description :

PT17-21C/L41/TR8 is a phototransistor in miniature SMD package which is molded in a water clear with flat top view lens. The device is spectrally matched to visible and infrared emitting diode.

■ Applications :

- Miniature switch
- Counters and sorter
- Interrupter
- Tape and card reader
- Encoder
- Position sensor


PART NO.	CHIP	LENS COLOR
	MATERIAL	
PT	Silicon	Water clear



0805 Package Infrared Chip LED

MODEL NO : PT17-21C/L41/TR8

■ Package Dimensions :

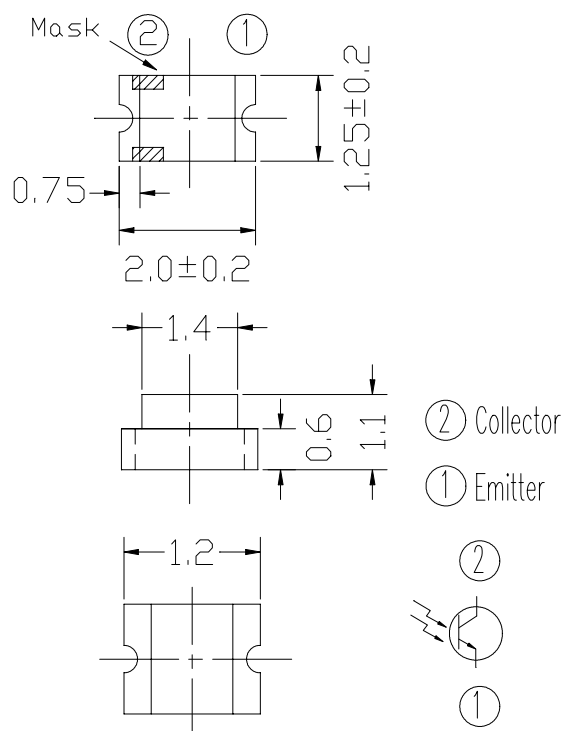

■ Notes :

1. All dimensions are in millimeter.
2. General Tolerance: ± 0.1 mm
3. Lens color : Water clear.
4. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
5. These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
6. When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



0805 Package Infrared Chip LED

MODEL NO : PT17-21C/L41/TR8

■ Absolute Maximum Ratings at $T_A = 25^{\circ}\text{C}$

Parameter	Symbol	Rating	Unit	Notice
Collector-Emitter Voltage	V_{CEO}	60	V	
Emitter-Collector-Voltage	V_{ECO}	5	V	
Collector Current	I_{C}	50	mA	
Operating Temperature	T_{opr}	-25 ~ +85	$^{\circ}\text{C}$	
Storage Temperature	T_{stg}	-40 ~ +85	$^{\circ}\text{C}$	
Lead Soldering Temperature	T_{sol}	260	$^{\circ}\text{C}$	
Power Dissipation at(or below) 25 $^{\circ}\text{C}$ Free Air Temperature	P_{c}	75	mW	

■ Electronic Optical Characteristics :







Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Collector-Emitter Breakdown Voltage	BV_{CEO}	60	----	----	V	$I_{\text{C}}=100\mu\text{A}$ $E_{\text{e}}=0\text{mW}/\text{cm}^2$
Emitter-Collector Breakdown Voltage	BV_{ECO}	5	----	----	V	$I_{\text{E}}=100\mu\text{A}$ $E_{\text{e}}=0\text{mW}/\text{cm}^2$
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	----	----	0.4	V	$I_{\text{C}}=2\text{mA}$ $E_{\text{e}}=1\text{mW}/\text{cm}^2$
Rise Time	t_{r}	----	15	----	μS	$V_{\text{CE}}=5\text{V}$ $I_{\text{C}}=1\text{mA}$ $R_{\text{L}}=1000\Omega$
Fall Time	t_{f}	----	15	----		
Collector Dark Current	I_{CEO}	----	----	100	nA	$E_{\text{e}}=0\text{mW}/\text{cm}^2$ $V_{\text{CE}}=20\text{V}$
On State Collector Current	$I_{\text{C(on)}}$	0.5	1.0	----	mA	$E_{\text{e}}=1\text{mW}/\text{cm}^2$ $V_{\text{CE}}=5\text{V}$
Wavelength of Peak Sensitivity	λ_{p}	----	860	----	nm	----
Rang of Spectrial Bandwith	$\lambda_{0.5}$	----	400-1200	----	nm	----



0805 Package Infrared Chip LED

MODEL NO : PT17-21C/L41/TR8

Typical Electrical/Optical/Characteristics Curves :

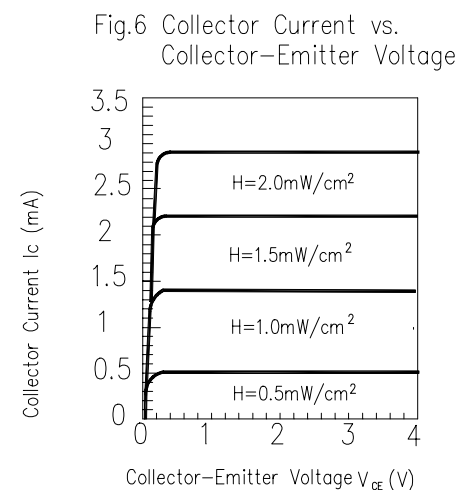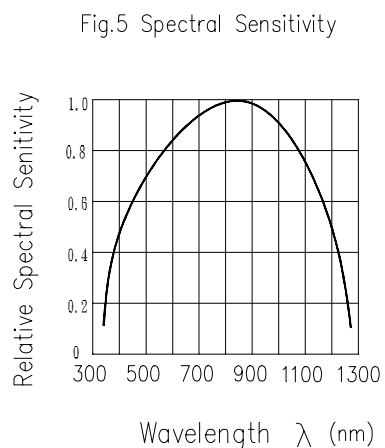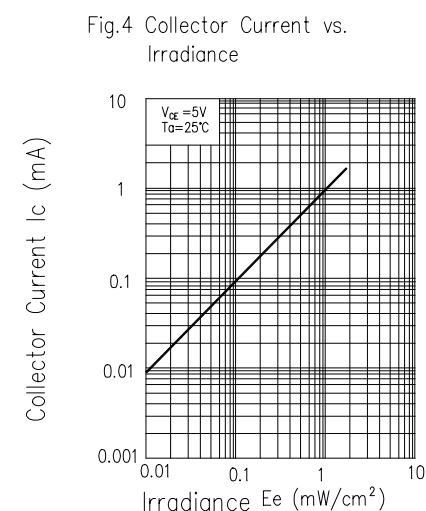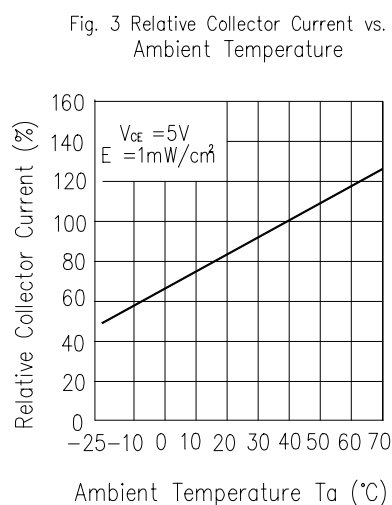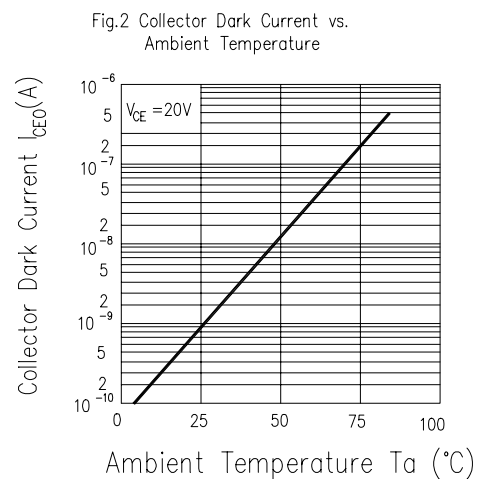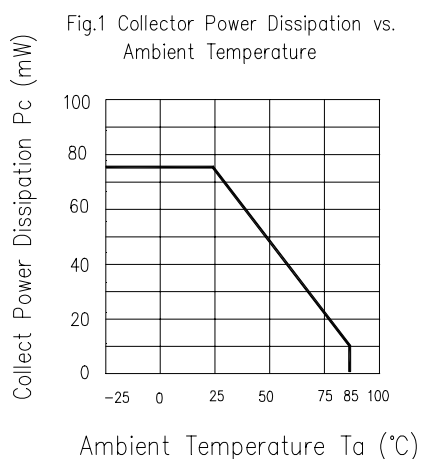



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTT-017-043
ECN :

REV : 1.0
PAGE : 5/7

0805 Package Infrared Chip LED

MODEL NO : PT17-21C/L41/TR8

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Sizes	Failure Judgement Criteria	Ac/Re
1	REFLOW	TEMP : 240℃ ± 5 ℃ 5 secs	6 Mins	22 pcs	$I_{C(on)} \leq L \times 0.8$ L:Lower specification limit	0/1
2	Temperature Cycle	H : +85℃ 30 mins ↑ 5 mins ↓ L : -55℃ 30 mins	50 cycles	22 pcs		0/1
3	Thermal Shock	H : +100℃ 5 mins ↑ 10 secs ↓ L : -10℃ 5 mins	50 cycles	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100℃	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55℃	1000 hrs	22 pcs		0/1
6	DC Operating Life	V _{CE} =5V	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85℃ / 85% R.H.	1000 hrs	22 pcs		0/1

DEVICE NUMBER : DTT-017-043
ECN :

REV : 1.0
PAGE : 6/7

0805 Package Infrared Chip LED


MODEL NO : PT17-21C/L41/TR8

■ Test Method For Reverse Light Current


Condition: $E_e=1\text{mW}/\text{cm}^2$, $V_{CE}=5\text{V}$

Test Item: Collector Current [$I_{C(on)}$]

(Unit: mA)

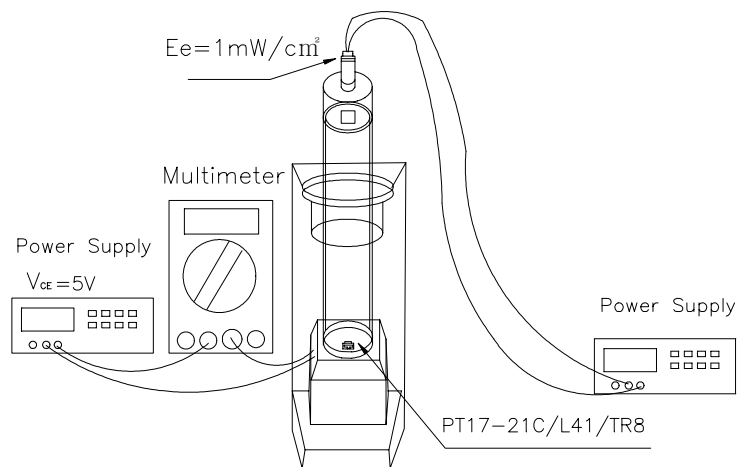

■ Taping Dimensions:

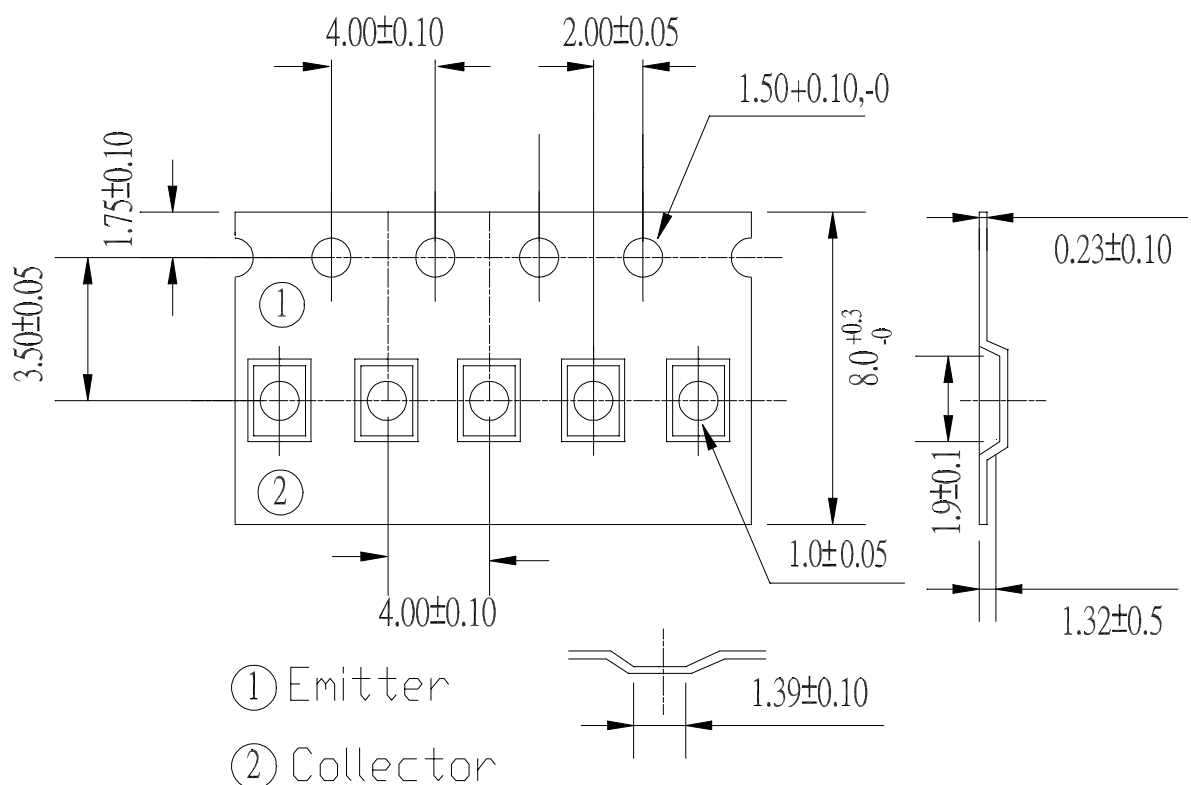




DEVICE NUMBER : DTT-017-043
ECN :

REV : 1.0
PAGE : 7/7

0805 Package Infrared Chip LED

MODEL NO : PT17-21C/L41/TR8

■ Packing Specifications

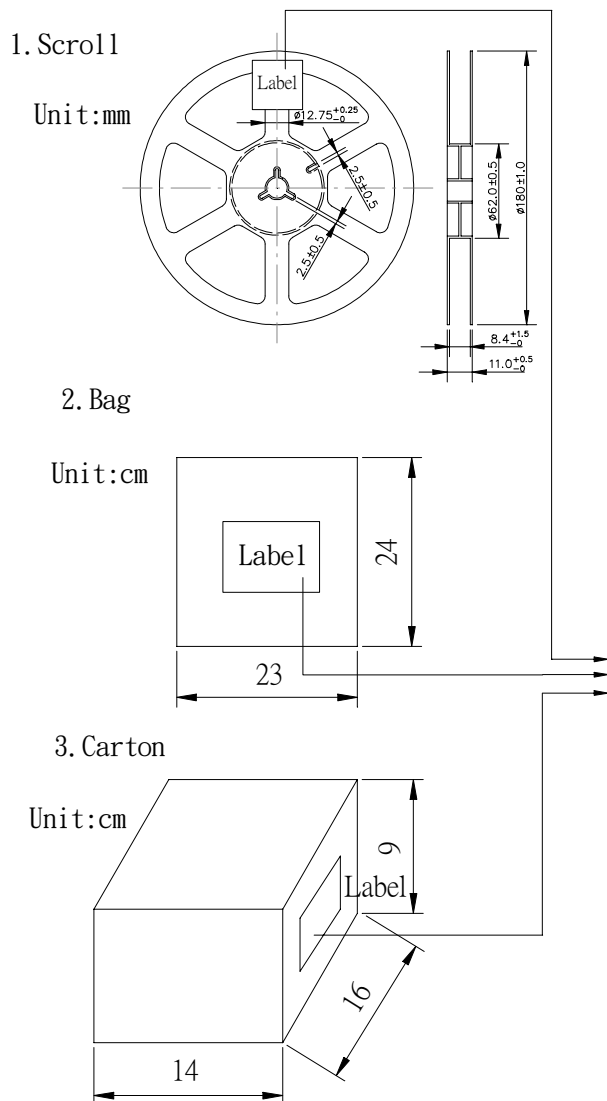

EVERLIGHT

CPN:

P/N:

PT17-21C/L41/TR8

QTY:

LOT NO:

CAT:

HUE:

REF:

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

■ Packing Quantity Specification

- 3000Pcs/1 Volume , 1 Volume/1Bag
- 10Bags/1Carton